

FOR PAINTERS · RENOVATORS · CONTRACTORS

MULTI-LAYER FLOOR PROTECTION

Professional temporary floor protection for active job sites. Roll it out, press it down, get to work.

3	160	300	36" × 100'	12 LB
LAYERS	GSM	SQ. FT.	ROLL SIZE	APPROX. WEIGHT

www.veraguard.ca | sales@veraguard.ca

TECHNICAL DATA

Complete product information for professional job-site use

Technical Specifications




VERAGUARD MULTI-LAYER
One roll = 300 sq. ft. · 36" × 100'

SPECIFICATION	DETAIL
Product type	Temporary multi-layer floor protection
Construction	3-layer: PE film + non-woven felt + self-adhesive anti-slip bottom
Material weight	160 GSM
Roll dimensions	36" × 100'
Coverage	300 sq. ft. per roll
Approx. roll weight	12 lb
Top layer	Protective PE film
Middle layer	Non-woven felt
Bottom layer	Self-adhesive anti-slip layer
Surface protection	Helps protect against paint, common spills, moisture, dust and job-site traffic
Water resistance	Water-resistant protective top surface
Installation	Roll out, position and press into place
Tape	No tape required for normal installation
Removal	Designed for temporary use; removable from compatible finished surfaces
Typical surfaces	Compatible finished hardwood, tile, laminate, vinyl and similar flooring. Test first
Delivery	Job-site delivery available

Surface note

Always test the material on a small, inconspicuous area before full installation, particularly on delicate, newly finished or specialty surfaces.

Three Layers. One Job.

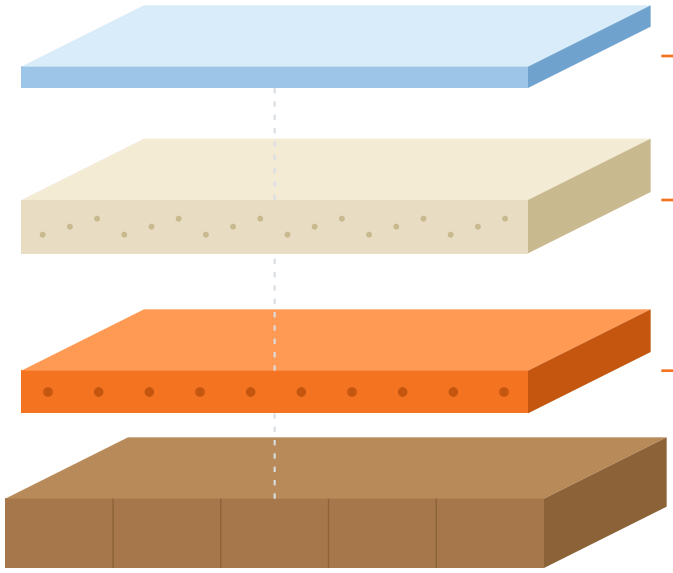

1 PROTECTIVE PE FILM

Top layer. Helps guard against paint, common spills and moisture.

2 NON-WOVEN FELT

Middle layer. Adds body and cushioning against traffic and dust.

3 SELF-ADHESIVE BOTTOM

Anti-slip layer. Helps keep the roll positioned on compatible surfaces.

YOUR FLOOR

The finished surface you are keeping clean.

Built for real job sites

Self-adhesive
Helps stay securely positioned on compatible surfaces.

No tape needed
Designed to reduce installation time.

Protective top film
Helps guard against paint, spills and moisture.

Anti-slip bottom
Helps provide grip on finished surfaces.

Contractor ready
Painting, renovation, construction, maintenance.

Lightweight roll
About 12 lb. Easy to carry between rooms.

Install in three steps

1 Roll out
Unroll along the area to protect.

2 Position
Align the edge and lay it flat.

3 Press down
Press into place. No tape for normal installation.

WHERE IT WORKS

Applications & Coverage

Plan your job in minutes



Made for the trades

Painting | Renovation | Remodeling | Construction | Property maintenance | Flooring installation

Typical surfaces

Finished hardwood | Tile | Laminate | Vinyl | Similar flooring

Always test a small, inconspicuous area first, especially on newly finished or specialty surfaces.

Rolls needed

AREA	
300 sq. ft.	1 roll
600 sq. ft.	2 rolls
900 sq. ft.	3 rolls
1,500 sq. ft.	5 rolls
2,400 sq. ft.	8 rolls
3,000 sq. ft.	10 rolls

One roll covers 300 sq. ft. Add a roll for overlaps and cut-offs.

Quick answers

Do I need tape?
No tape is required for normal installation. The self-adhesive bottom layer holds the roll in place.

Is it waterproof?
The top film is water-resistant and helps protect against common spills and moisture.

How do I cut it?
Cut to length with a utility knife and press the edge down.

Do I need a test patch?
Yes. Test a small area first on delicate or newly finished floors.

VERAGUARD
FLOOR PROTECTION



PROTECT THE FLOOR.
GET TO WORK.

VeraGuard is designed for professionals who need efficient temporary floor protection without slowing down the project.

MULTI-LAYER FLOOR PROTECTION

$59.99

per roll · 300 sq. ft.

About $0.20 per sq. ft. · CAD

36" × 100' ROLL

1 Request a quote

Email sales@veraguard.ca or use the quote form at www.veraguard.ca.

2 Confirm your order

Tell us how many rolls and where the job site is.

3 Delivered to site

Job-site delivery on orders of 3+ rolls within 30 km. Farther? Mention it in your request.

www.veraguard.ca

sales@veraguard.ca

Job-site delivery available.

Serving contractors across the GTA.